

Figure 7-45. Available Valve Pressure Drop

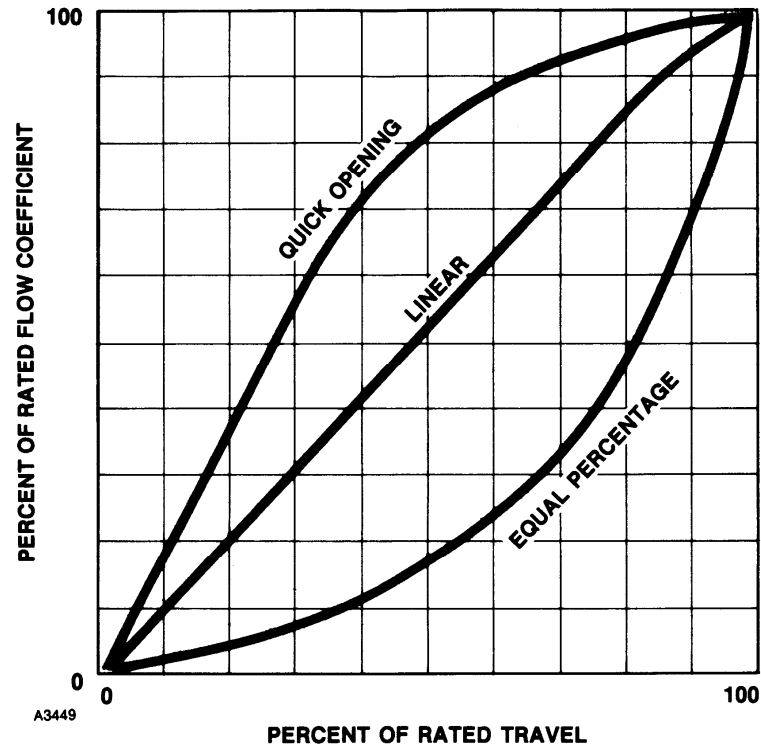


Figure 7-46. Theoretical Inherent Valve Characteristics

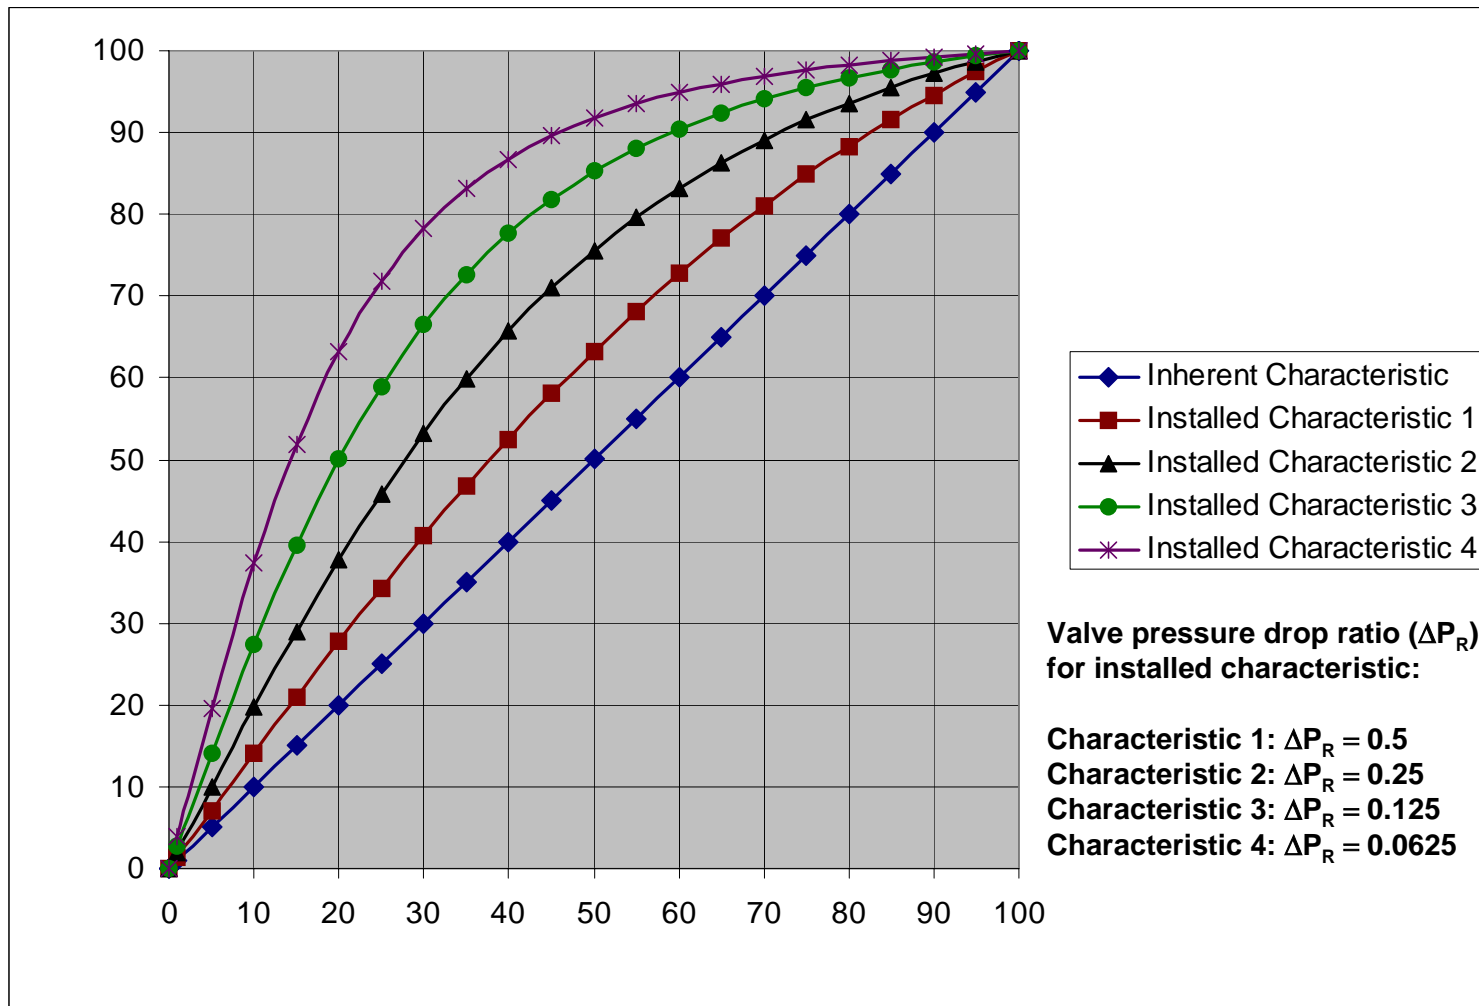


Figure 7-47a. Installed Valve Characteristic Curves for Linear Trim

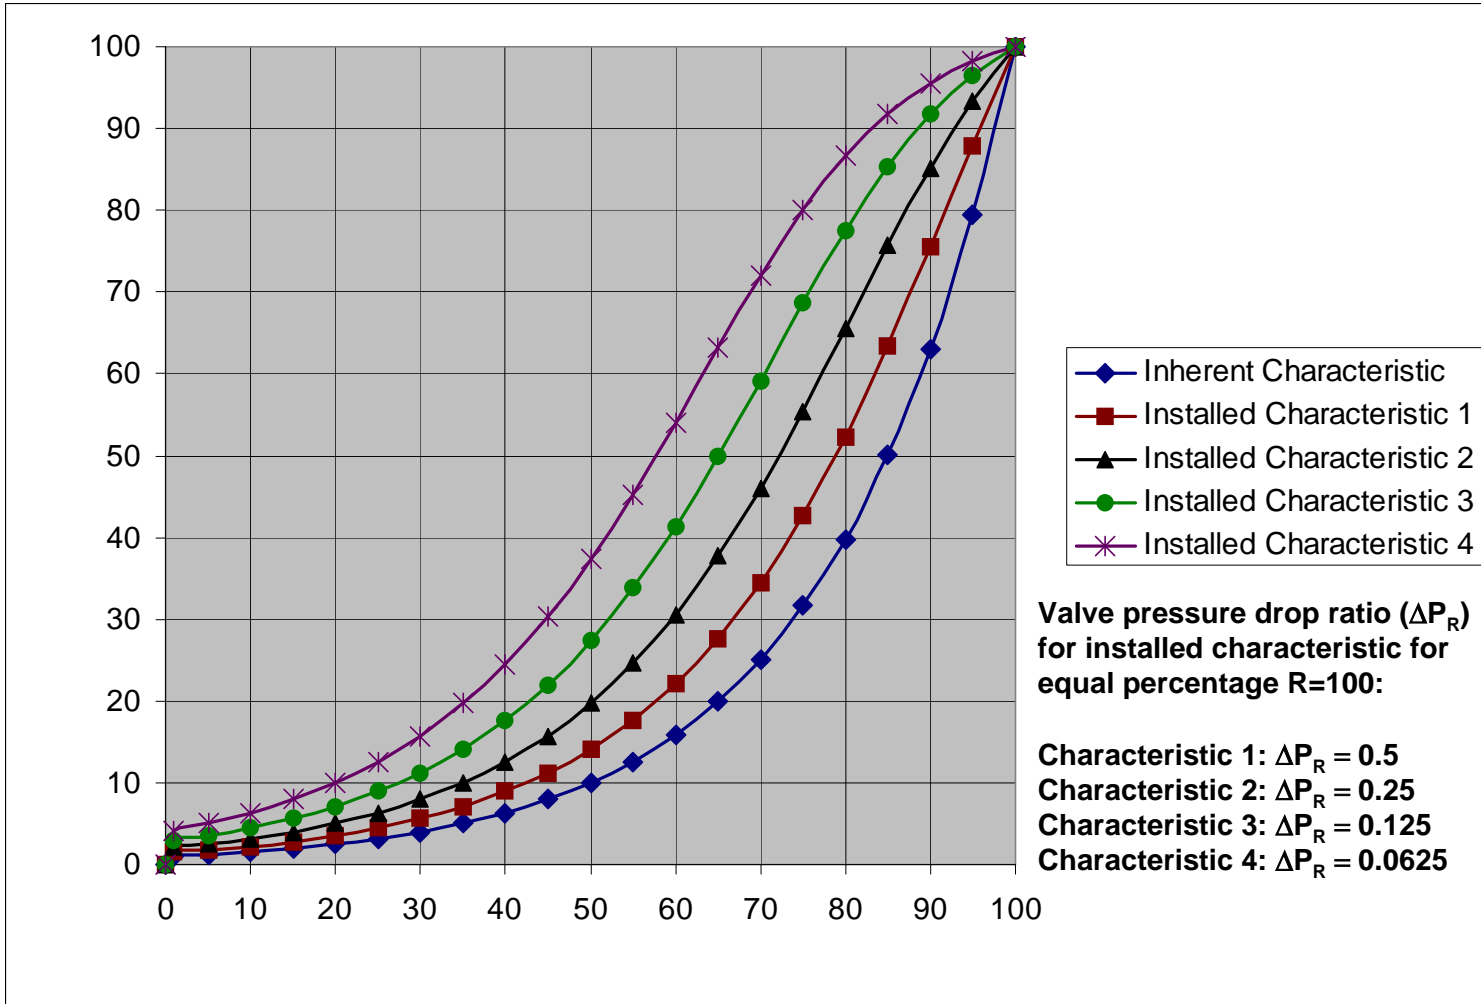


Figure 7-47b. Installed Valve Characteristic Curves for Equal Percentage Trim

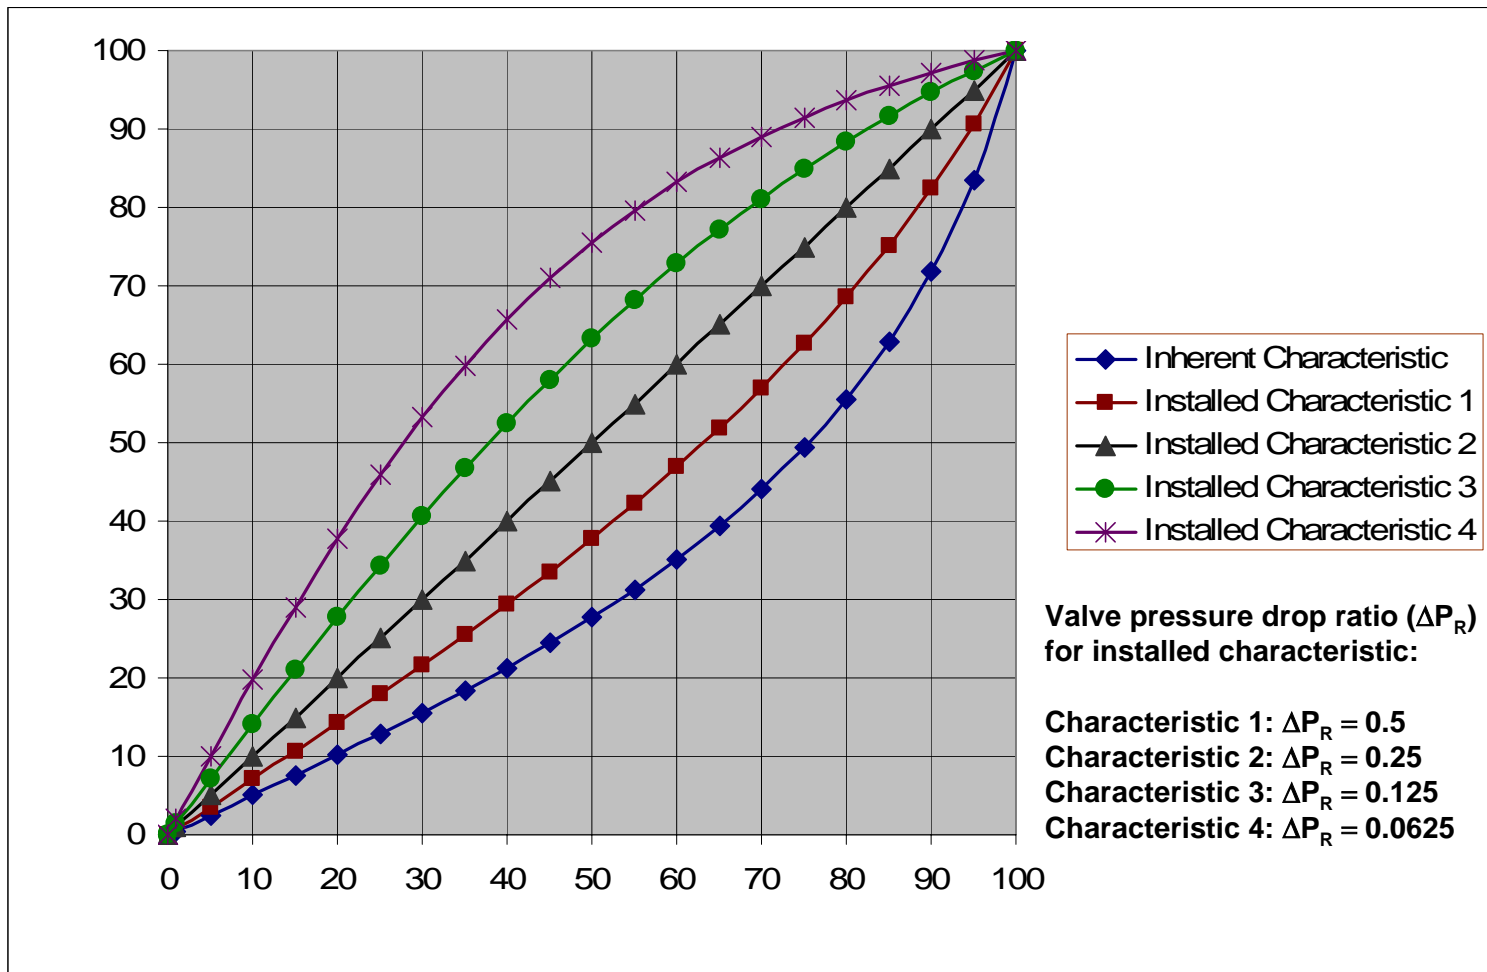


Figure 7-47c Installed Valve Characteristic Curves for Modified Percentage Trim

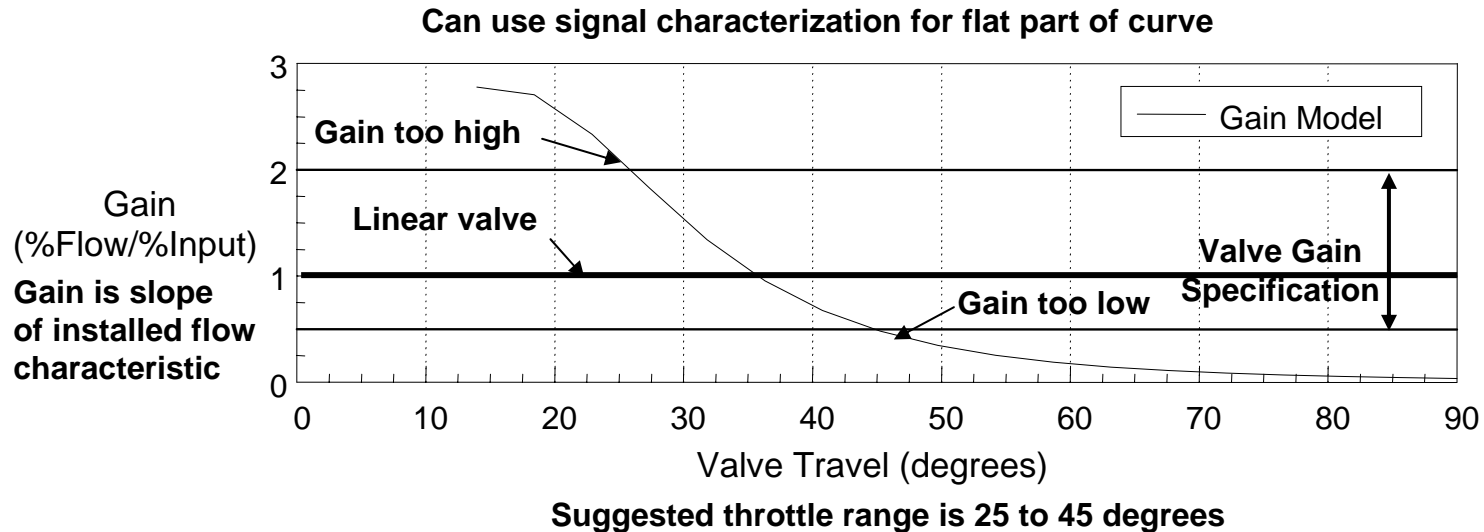
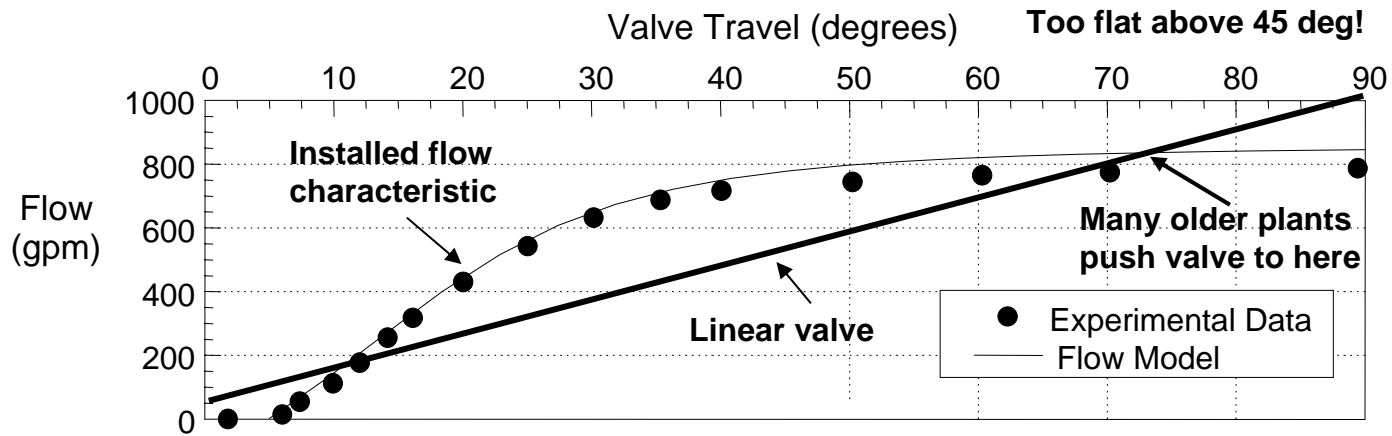


Figure 7-48a. Installed Conventional Disc Butterfly Valve Characteristic


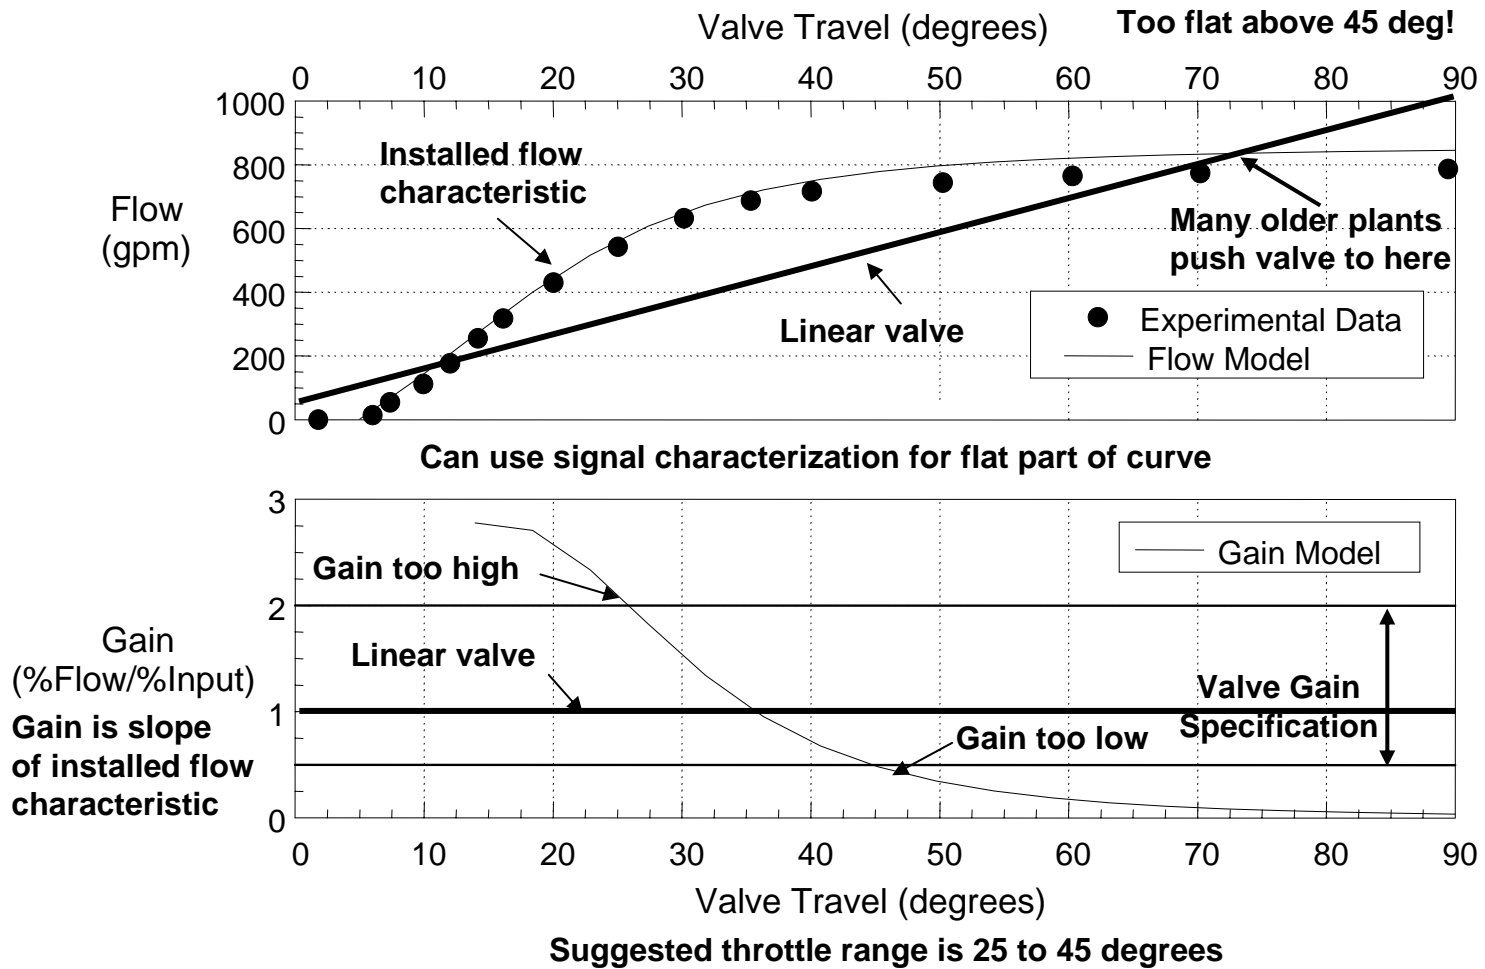


Figure 7-48b. Installed V-Ball Valve Characteristic

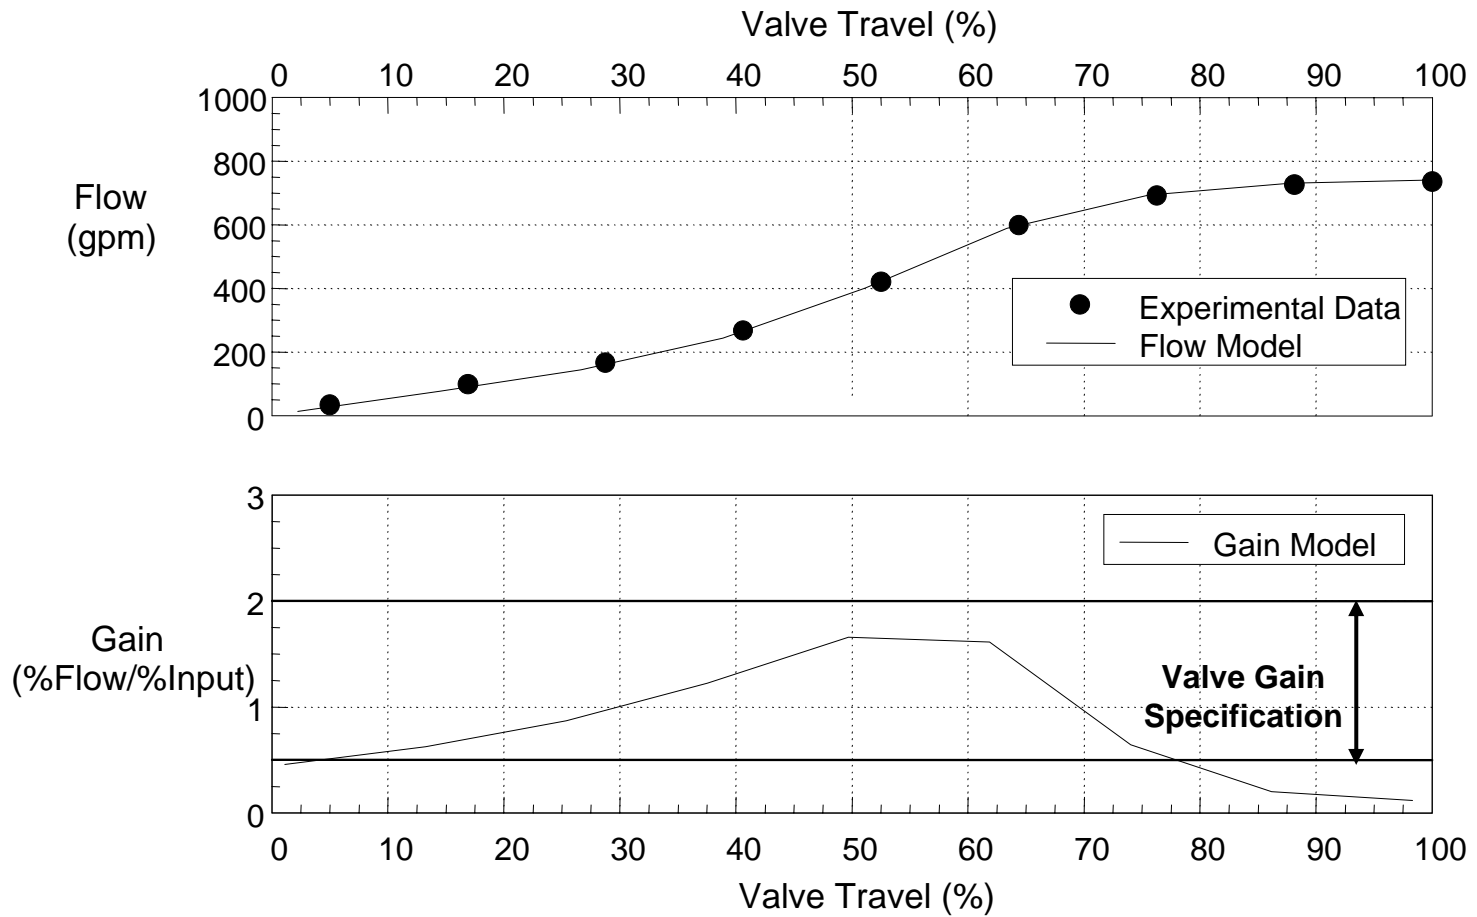

**Suggested throttle range is 5 to 75 %**

Figure 7-48c. Installed Sliding Stem (Globe) Valve Characteristic